


Processor System	CPU(Socket FCLGA1155)	Intel® i7-3770S	Intel® i5-3470S	Intel® I3-2120	Intel® Celeron® G1620
	Frequency	3.1GHz	2.9GHz	3.3GHz	2.7GHz
	L3 Cache	8M	6M	3M	2M
	Main Board	PC67H			
	System Chipset	Intel® BD82H77 FCBGA942			
	BIOS	AMI 64-Mbit SPI Flash BIOS			
Memory	Technology	DDR3 1333/1600 MHz		DDR3 1333/1066 MHz	
	Max. Capacity	16 GB			
	Socket	2 x 240-pin DIMM			
Internal Display 15" (LED Backlight)	Panel Size	15.0"			
	Resolution	1024x768			
	Viewing Angle	Horizontal : 80 / Vertical : 70 degree			
	Brightness	250 cd/m ²			
	Color Support	16194277/262144 Color			
	Contrast Ratio	700			
	Response Time	16ms (Rising : 5 ms / Falling : 11 ms)			
Internal Display 19" (LED Backlight)	Panel Size	19.0"			
	Resolution	1280x1024			
	Viewing Angle	Horizontal : 85 / Vertical : 80 degree			
	Brightness	350 cd/m ²			
	Color Support	16.7M			
	Contrast Ratio	1000			
External Display	Digital Display	1920 x 1200, Max. data rate up to 1.65 Gb/s			
	CRT	Max. resolution up to 2048 x 1536 true color			
Touchscreen 15"	Touchscreen Type	5 Wire Resistive			
	Surface Hardness	3H Pencil, Pressure 750g/45°			
	Durability	10000000 times			
	Transparency	80% (±3%)			
Touchscreen 17"	Touchscreen Type	5 Wire Resistive			
	Surface Hardness	3H Pencil, Pressure 750g/45°			
	Durability	10000000 times			
	Transparency	80% (±3%)			
I/O Interface	USB	USB 3.0 x 2; USB 2.0 x 8			
	Serial Port	COM 1: RS-232 COM 2 : Default RS-232(Optional: RS-422/485)			
	ESATA	ESATA x 2			
Ethernet	Speed	10/100/1000 Mbps			
	Controller	Realtek RTL8111E-VC-CG			
	Connector	RJ45 x 1			
Audio	Chipset	Realtek ALC662-GR			




	Speaker	Internal: Speaker 8Ω/2W x2 External: Speaker out x1, Mic in x1
Storage	HDD	Supports one 2.5" SATA HDD
	DVD	Supports one Slim DVD
Card Read	YD-8V74	5.25" Media Card reader Read Only
Scanner (Optional)	IS3480	1D omni-direction (Optional)
Receipt Printer	NP-K204	2" Auto Loading function Paper near-end detection
Photo Printer	DNP DS-RX1	Resolution: up to 300x600 dpi Print time: 15 sec
		Picture sizes" 4"x6", 5"x7", 6"x8" Power: AC 100~240V @50~60Hz Ribbon Finish: YMC & Overcoat
Power	Power Type	ATX 1U 180W
	Power Input	AC 100~240V @50~60Hz
	Battery	Lithium 3 V / 220 mAH

▪ 31 (0)624519198 ▪ info@rontronic.nl ▪ www.rontronic.nl

Dimensions

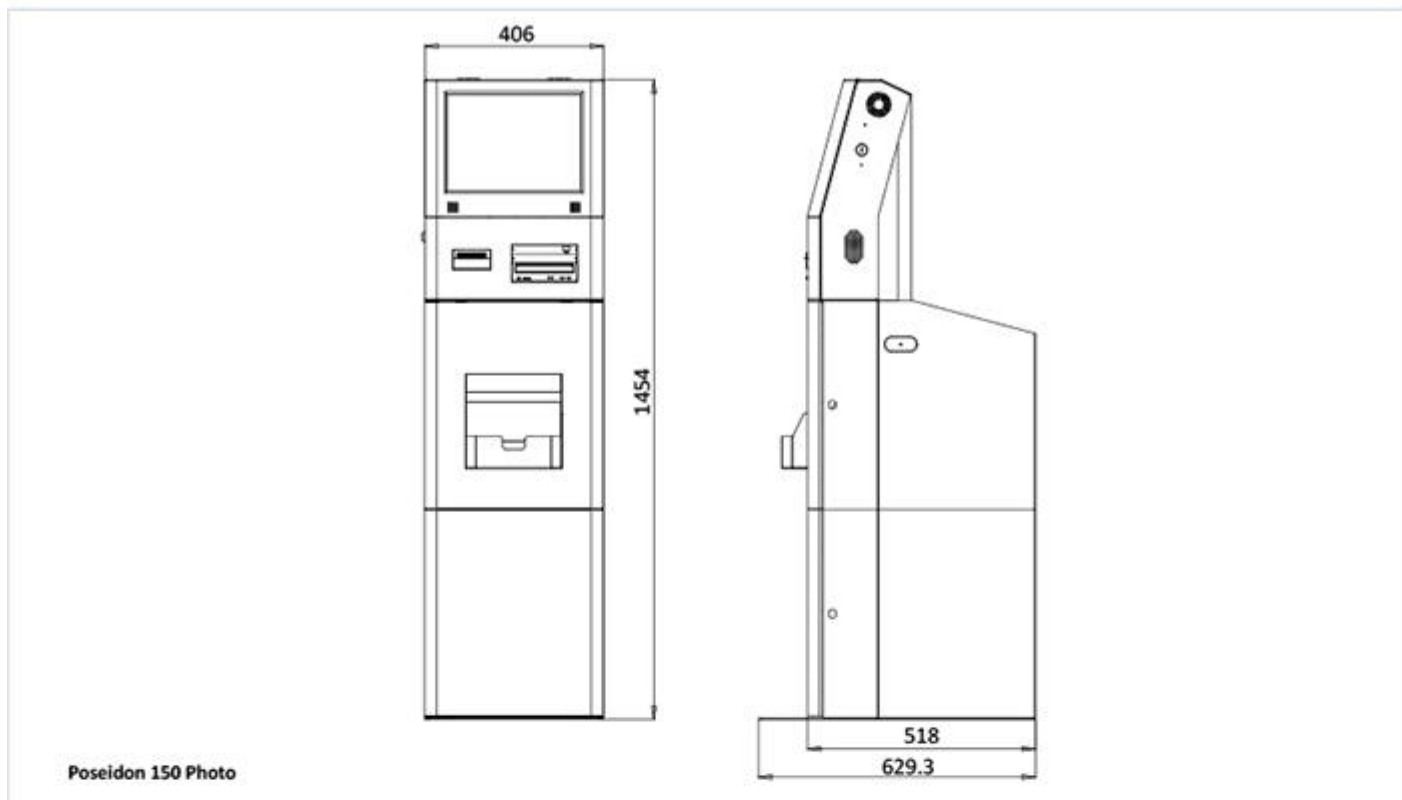

Fully-Integrated I/O

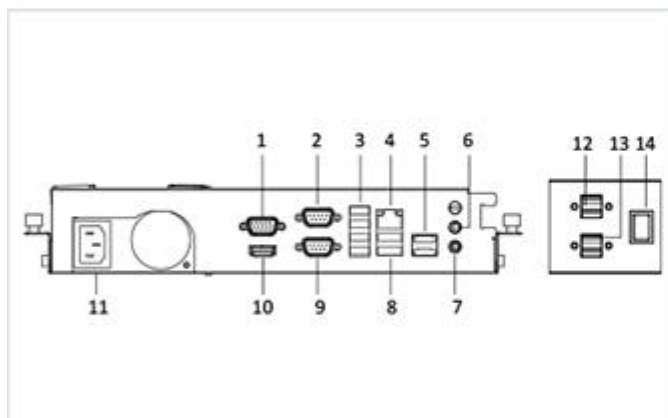

- | | | |
|---------------|---------------------|------------------|
| 1. VGA | 6. Speaker out | 11. AC input |
| 2. COM2 | 7. MIC in | 12. USB 2.0 x2 |
| 3. USB 2.0 x4 | 8. USB 3.0 x2 | 13. USB 2.0 x2 |
| 4. LAN | 9. COM1 | 14. Power button |
| 5. ESATA | 10. Digital Display | |



Option

