



Processor System	CPU FCBGA559 (on Board)	Atom D2550
	Frequency	1.86GHz
	L3 Cache	1 MB
	Main Board	PC25N
	System Chipset	Intel® Cedarview & NM10
	BIOS	AMI 16-Mbit SPI Flash BIOS
Memory	Technology	DDR3 800/1066 MHz
	Max. Capacity	2 GB
	Socket	1 x 204-pin SO DIMM
Internal Display 10.06"	Panel Size	10.06"
	Resolution	1024 x 600
	Viewing Angle	Right: 45 / Left: 45 / Top: 20 / Bottom: 45 degree
	Brightness	200 cd/m ²
	Color Support	262,144 color
	Contrast Ratio	500
External Display	Response Time	10ms (Rising: 3 ms / Falling: 7 ms)
	Digital Display	1920 x 1200, Max. data rate up to 1.65 Gb/s
Touchscreen 10.1"	CRT	Max. resolution up to 1920 x 1200 true color
	Touchscreen Type	5 Wire Resistive
	Surface Hardness	3H pencil, pressure 750g/45°
	Durability	10,000,000 times
I/O Interface	Transparency	80% (±3%)
	USB	USB 2.0 x 2
	Serial Port	COM 1: RS-232 COM 2 : Default RS-232 (Optional: RS-422/485)
Ethernet	Speed	10/100/1000 Mbps
	Controller	Realtek RTL8111E-VC-CG
	Connector	RJ45 x 1
Audio	Chipset	Realtek ALC662-GR
	Speaker	Internal: Speaker 8Ω/3W x1
Storage	HDD	Supports one 2.5" SATA HDD
	DVD	Supports one 5.25" SATA DVD-RW
Card Read	YD-8V74	5.25" Media Card reader Read Only
Printer	NP-K04	2" Auto Loading function Paper near-end detection
Power	Power Type	19V DC open frame power adapter
	Power Input	AC 100~240V @50~60Hz
	Battery	Lithium 3 V / 220 mAH
OS Support		Mircosoft Windows



Dimensions

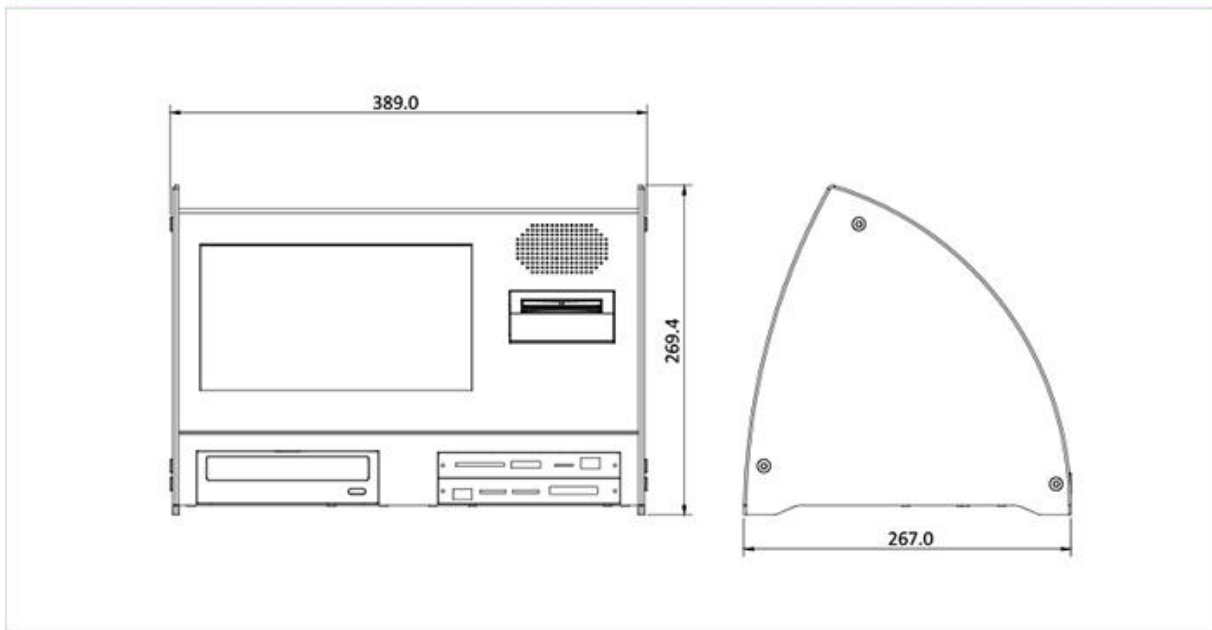

Fully-Integrated I/O

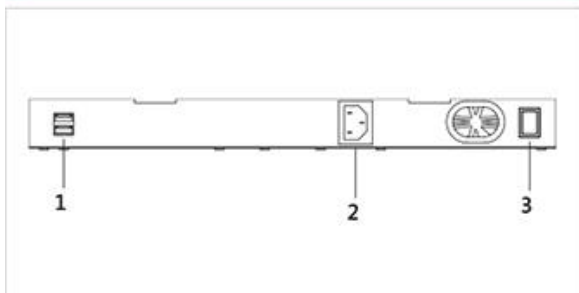

1. USB 2.0 x2
2. AC input
3. Power button

Option



DVD



2" Thermal Printer



Media Card Reader



SnapFoto Kiosk Software